

Test 1

Fri Feb 2

1.1-1.4, 2.1-2.2

Definition: A **matrix** is a rectangular array of numbers. For example, $A = \begin{bmatrix} 1 & 0 & 1 \\ 2 & -1 & 3 \end{bmatrix}$

Definition: The **determinant** of a matrix A is written $\det A$ or $|A|$. The determinant is only defined for square matrices.

Fact:

$$\begin{vmatrix} a & b \\ c & d \end{vmatrix} = ad - bc$$

AND

$$\begin{vmatrix} a & b & c \\ d & e & f \\ g & h & i \end{vmatrix} = a \begin{vmatrix} e & f \\ h & i \end{vmatrix} - b \begin{vmatrix} d & f \\ g & i \end{vmatrix} + c \begin{vmatrix} d & e \\ g & h \end{vmatrix}$$

Comment: The second formula is called **cofactor expansion**.

Comment: Notice that the second term in the cofactor expansion has a negative sign.

Example: Compute $\det \begin{bmatrix} 1 & 4 & 6 \\ 2 & 1 & 3 \\ 0 & 6 & 7 \end{bmatrix}$

$$= 1 \begin{vmatrix} & & \\ & & \\ & & \end{vmatrix} - 4 \begin{vmatrix} & & \\ & & \\ & & \end{vmatrix} + 6 \begin{vmatrix} & & \\ & & \\ & & \end{vmatrix}$$

$$= 1 \begin{vmatrix} 1 & 3 \\ 6 & 7 \end{vmatrix} - 4 \begin{vmatrix} 2 & 3 \\ 0 & 7 \end{vmatrix} + 6 \begin{vmatrix} 2 & 1 \\ 0 & 6 \end{vmatrix}$$

$$= 1(-11) - 4(14) + 6(12)$$

$$= 5$$

Example: Compute $\begin{vmatrix} -1 & -4 & 6 \\ 1 & 1 & 2 \\ 1 & 1 & 8 \end{vmatrix}$

$$= -1 \begin{vmatrix} 1 & 2 \\ 1 & 8 \end{vmatrix} + 4 \begin{vmatrix} 1 & 2 \\ 1 & 8 \end{vmatrix} + 6 \begin{vmatrix} 1 & 1 \\ 1 & 1 \end{vmatrix}$$

$$= -1(6) + 4(6) + 6(0)$$

$$= 18$$

Notation: Let:

$$\vec{i} = [1, 0, 0]$$

$$\vec{j} = [0, 1, 0]$$

$$\vec{k} = [0, 0, 1]$$

Fact: A second method of calculating the cross product is:

$$[u_1, u_2, u_3] \times [v_1, v_2, v_3] = \begin{vmatrix} \vec{i} & \vec{j} & \vec{k} \\ u_1 & u_2 & u_3 \\ v_1 & v_2 & v_3 \end{vmatrix}$$

Example: Calculate $[2, 1, 3] \times [-6, 4, 2]$ using the original method.

$$\begin{array}{ccccc} 2 & 1 & 3 & 2 & 1 \\ -6 & 4 & 2 & -6 & 4 \end{array} \quad [-10, -22, 14]$$

Example: Calculate $[2, 1, 3] \times [-6, 4, 2]$ using the second method. Notice why cofactor expansion has a negative sign on the second term.

$$\begin{vmatrix} \vec{i} & \vec{j} & \vec{k} \\ 2 & 1 & 3 \\ -6 & 4 & 2 \end{vmatrix}$$

$$= \vec{i} \begin{vmatrix} 1 & 3 \\ 4 & 2 \end{vmatrix} - \vec{j} \begin{vmatrix} 2 & 3 \\ -6 & 2 \end{vmatrix} + \vec{k} \begin{vmatrix} 2 & 1 \\ -6 & 4 \end{vmatrix}$$


$$= \vec{i}(-10) - \vec{j}(22) + \vec{k}(14)$$

$$= -10[1, 0, 0] - 22[0, 1, 0] + 14[0, 0, 1]$$


$$= [-10, -22, 14] \quad \checkmark \quad \text{Columns are out of order in } \begin{vmatrix} 2 & 3 \\ -6 & 2 \end{vmatrix}.$$

Fact: Three geometry formulas:


1) Area(parallelogram in \mathbb{R}^3) = $\|\vec{u} \times \vec{v}\|$



2) Area(parallelogram in \mathbb{R}^2) = absolute value of $\det \begin{bmatrix} u_1 & u_2 \\ v_1 & v_2 \end{bmatrix}$



3) ~~Area~~ ^{Volume} (parallelepiped in \mathbb{R}^3) = absolute value of $\det \begin{bmatrix} u_1 & u_2 & u_3 \\ v_1 & v_2 & v_3 \\ w_1 & w_2 & w_3 \end{bmatrix}$

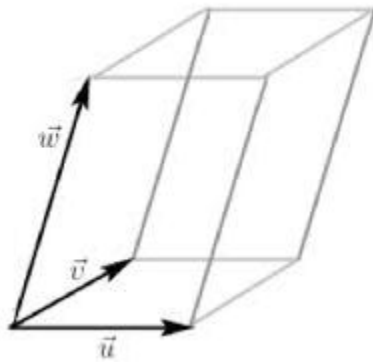


slanted box
or parallelepiped

Example: Find the area of the parallelogram determined by $[1, 6]$ and $[3, 5]$.

$$\begin{aligned}
 &= \left(\begin{vmatrix} 1 & 6 \\ 3 & 5 \end{vmatrix} \right) \\
 &= |-13| \\
 &= 13
 \end{aligned}$$

Example: Do the vectors $[1, 4, 7]$, $[2, 5, 9]$ and $[1, -2, -3]$ lie in a common plane?

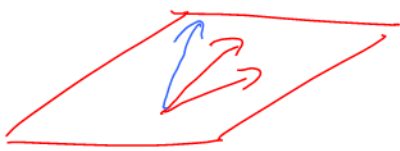

Yes if and only if
 $V(\text{slanted box}) = 0$

$$\begin{aligned}
 V(\text{slanted box}) &= \begin{vmatrix} 1 & 4 & 7 \\ 2 & 5 & 9 \\ 1 & -2 & -3 \end{vmatrix} \\
 &= 1 \begin{vmatrix} 5 & 9 \\ -2 & -3 \end{vmatrix} - 4 \begin{vmatrix} 2 & 9 \\ 1 & -3 \end{vmatrix} + 7 \begin{vmatrix} 2 & 5 \\ 1 & -2 \end{vmatrix} \\
 &= 1(3) - 4(-15) + 7(-9) \\
 &= 0 \\
 &= 0
 \end{aligned}$$

Yes

Chapter 2: Systems of Linear Equations

2.1 Linear Systems


Definition: A **linear equation** in \mathbb{R}^2 has the form $ax + by = c$, where a, b and c are real numbers.

Definition: A **linear system** in \mathbb{R}^2 consists of two or more linear equations. It's often just called a **system**.

Comment: Here's an example of a system:

$$\begin{aligned} 2x + 6y &= -14 \\ -3x + 3y &= -15 \end{aligned}$$

Fact: A system can have: no solution, one unique solution or infinitely-many solutions.

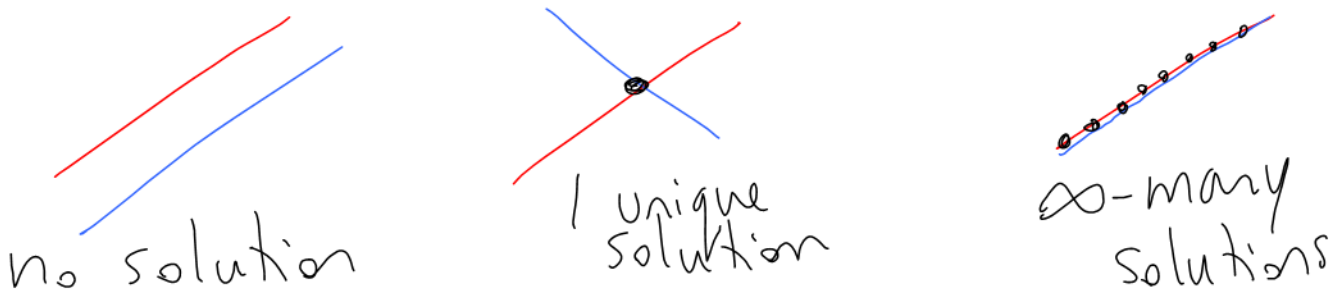

Definition: A system with no solution is called an **inconsistent system**. (*unsolvable*)
A **consistent system** has one solution or infinitely-many solutions. In other words, a consistent system is solvable.

Definition: Consider the system:

$$\begin{aligned} 2x + 6y &= -14 \\ -3x + 3y &= -15 \end{aligned}$$

The matrix $\begin{bmatrix} 2 & 6 \\ -3 & 3 \end{bmatrix}$ is called the **coefficient matrix**.

The matrix $\begin{bmatrix} 2 & 6 & | & -14 \\ -3 & 3 & | & -15 \end{bmatrix}$ is called the **augmented matrix**.